Easy Installation Guide

Thank you for purchasing this Cap-Pack® Innovative Truck Storage product. Visit our website at https://www.cap-pack.com /accessories.html for information on additional accessories.

For Models CPS-5 and CPS-6

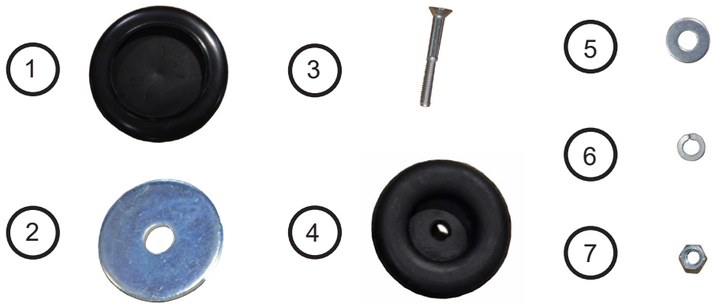

Parts List

Item No.	Part Description	Quantity
1	Nylon Cover	4
2	Reinforcement Washer	4
3	5/16 inch bolt	4
4	Rubber bumper	4
5	5/16 inch flat washer	4
6	5/16 inch split lock washer	4
7	5/16 inch nut	4

STEP ①

CAUTION: The Cap-Pack® Sport is rated for 100 lb. capacity (evenly distributed weight).

Use a forklift or other device to center and raise the Cap-Pack® Sport in the cap until it gently makes contact with the cap ceiling.

STEP ②

Measure vertical distance from cap ceiling to door opening

Set back is the measured distance

Determine the Cap-Pack® Sport set back by measuring the vertical distance from cap ceiling to the top of cap door opening. (NOTE: If the door hinge extends lower than cap door opening, measure to the bottom of the hinge instead. Be sure to measure from the flat part of cap ceiling, not a sloping corner.) This measurement is the needed setback from the outside of the Cap-Pack® Sport handles to the cap door opening. See examples below.

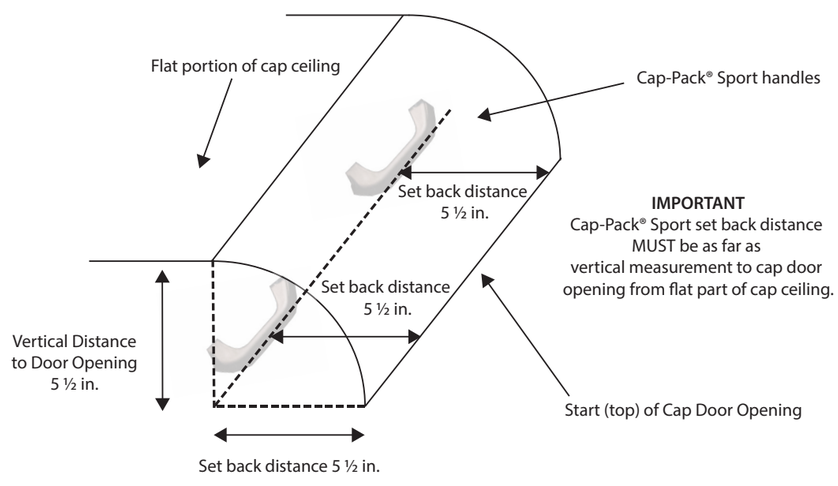

Example 1

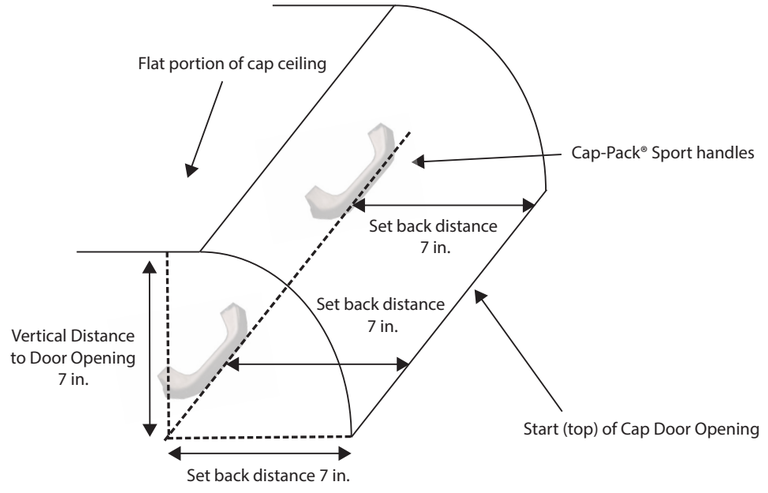

Example 2

STEP 3

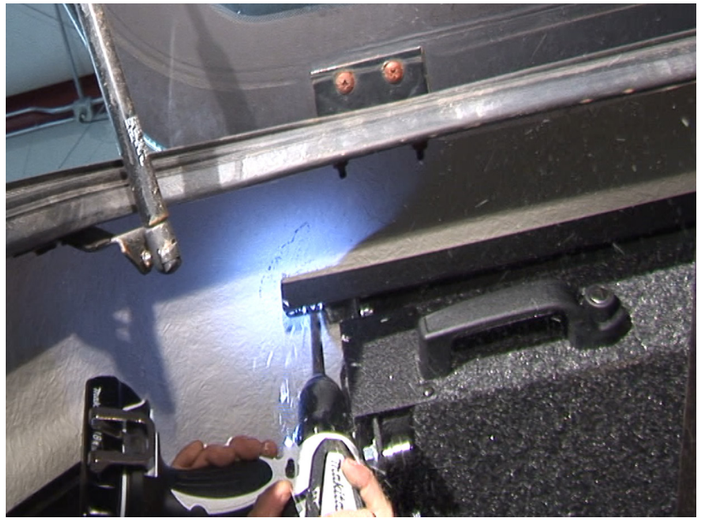

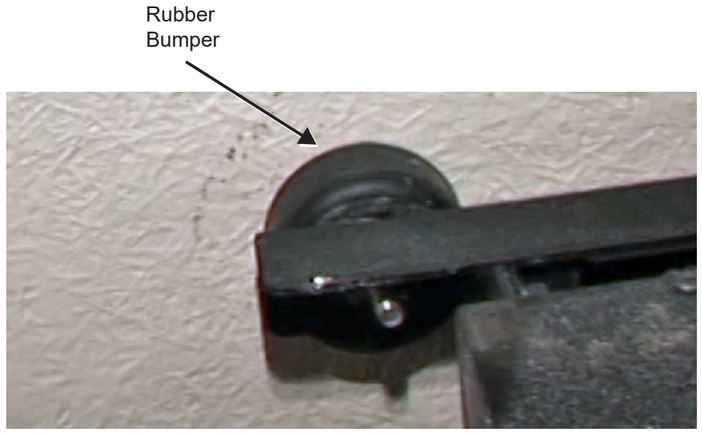

Drill 3/8 inch holes in the cap ceiling at each of the 4 frame corner mounting slots. The slotted mounting holes on the frame allow for position adjustments of the hole around other ceiling mounted accessories (ladder rack, etc.). Insert 5/16 inch bolt (Item No. 3) into a reinforcement washer (Item No. 2). Stretch the nylon weather seal cover (Item No. 1) over the washer. Insert/drop the bolt into the drilled holes (4 locations) from the outside of the cap. Lower the lifting device approx. 2 inches to insert the rubber bumpers (Item No. 4) onto the mounting bolts between the Cap Pack® Sport frame and the cap ceiling.

STEP 4

Fasten each corner of the Cap-Pack® Sport frame using 5/16 inch flat washer (Item No. 5), 5/16 inch split lock washer (Item No. 6), and 5/16 inch nut (Item No. 7). Tighten each corner until the rubber bumper compresses slightly (about 1/4 inch).

Check the frame mounting hardware for tightness after 500 miles. Periodically check.

CAUTION: For better weight distribution, keep the tailgate in the up position when lowering the Cap-Pack® Sport.